






MBYZ16HD



Terminal Dimensions (mm)

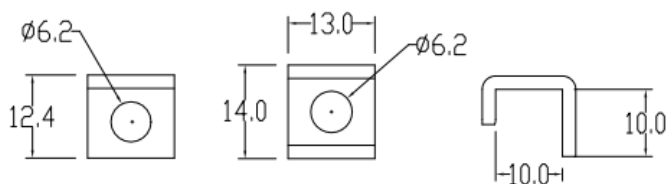

Physical Dimensions (in./mm)

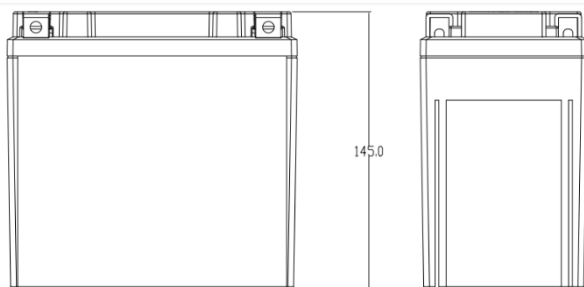

Length: 5.94in(151mm) Width: 3.43in(87mm)
Height: 5.70in(145mm)

Tolerances are ± 0.04 inches (± 1 mm) and ± 0.08 inches (± 2 mm) for height.

All data subject to change without notice.

Features

- Patented Quad Terminal Design-Reduce carrying costs
- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat(AGM)technology
- Brass Terminals- superior conductivity
- US DOT, IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-ready to Install

Performance Specifications

Nominal Voltage ----- 12 volts(6cells)

Nominal Capacity 25°C(77°F)

20-hr. (0.83A to 10.50 volts) -----17.5AH

10-hr. (1.65A to 10.50 volts) ----- 16.5AH

5-hr. (3.30A to 10.20 volts) ----- 13.53AH

1C. (16.5A to 9.60 volts) -----11.55AH

3C. (49.5A to 9.60 volts) -----6.44AH

Approximate Weight -----11.13lbs. (5.05kg)

Energy Density (20-hr rate) -----1.62W-h / in³ (98.7W-h/1)

Specific Energy (20-hr rate) -----17.6W-h / lb (38.8W-h/kg)

Internal Resistance (approx) -----18 milliohms

CCA(-0 4°F/-18°C,7.2V,30S) -----240 amperes

CA(32°F/0°C,7.2V,30S) -----308 amperes

Shelf Life (% of normal capacity at 68°F/20°C) --- SOC% OCV

1 months ----- 97% 12.78V

3 months ----- 91% 12.70V

6 months ----- 83% 12.5V

Operating Temperature Range

Discharge ----- -4°F(-20°C) to 122°F(50°C)

Charge ----- -40°F(-40°C) to 140°F(60°C)


Case ----- ABS




SCREW




Shelf life & Storage

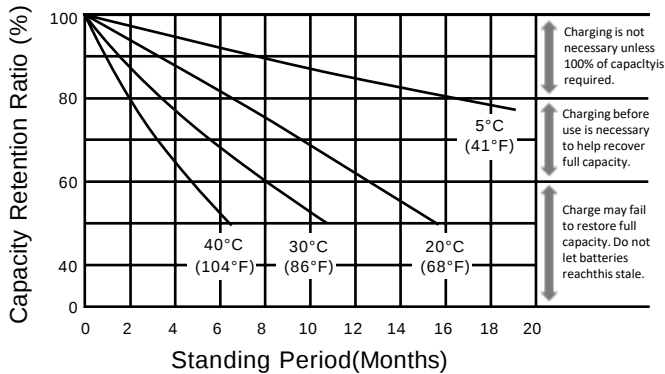


Discharge Characteristics

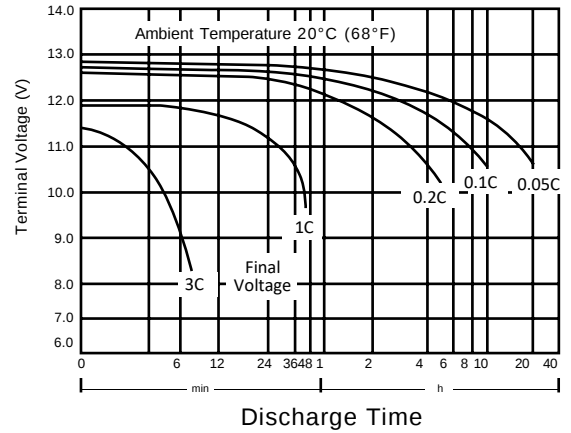

Discharge Time vs. Discharge Current

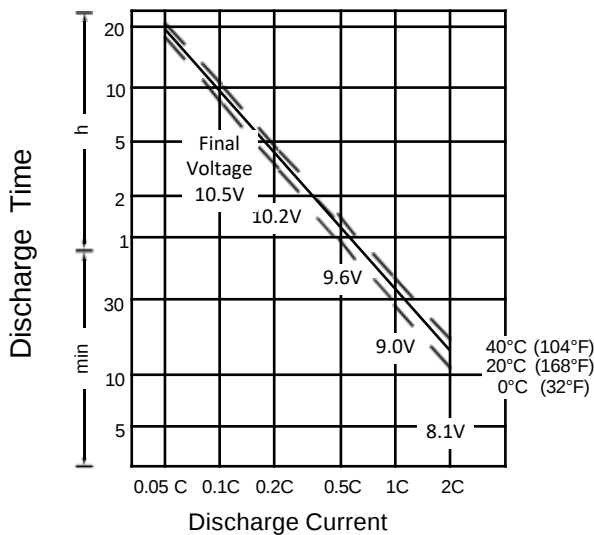

Life Characteristics in Cyclic Use

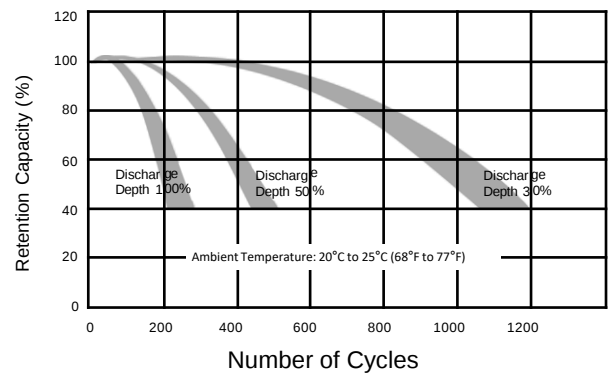

Charging

Cycle Applications: Limit initial current to 0.2C. Charge until battery voltage (undercharge) reaches 14.8 to 15.0 volts at 68°F (20°C). Hold at 14.8 to 15.0 volts until current drops to under 50 mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 2A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at www.motobatt.com

Can be used to replace

GYZ16HL	GYZ16H	YTX14	YTX14BS
YTX14H	YTX14HBS	YTX14L	YTX14LBS
KMX14BS			

Further information

Please refer to our website www.motobatt.com to locate a distributor in your area.